



CARE & USE GUIDE

FOR NEXT DIMENSION PRODUCTS

Care and Use

The following information has been provided to assist in preserving the integrity and reliability of your Windsor products.

To best use the guidelines that follow, you will need to know whether your windows have a factory-applied paint finish.

Some of Windsor's Next Dimension vinyl windows have a factory-applied paint or laminate finish, some do not. As you read through these guidelines, you will notice that many of the guidelines have different recommendations depending upon whether or not the windows have a factory-applied finish.

If you are not sure whether your windows have a factory-applied paint or laminated finish, please contact Windsor through the phone numbers at the end of this guide.

If you still have questions after consulting this Care and Use Guide, please contact Windsor through the phone numbers at the end of this guide.

Installation

Your product should be inspected and installed following the steps described in the supplemental instruction pamphlet provided with your Windsor unit. Improper installation may cause your unit to perform poorly, which could reduce the life expectancy and/or void the warranty. To receive a copy of the written warranty and/or a copy of the installation instructions, contact your local authorized Windsor distributor or visit www.windsornextdimension.com/warranty.

DO NOT PAINT HARDWARE OR WEATHERSTRIP.

DO NOT PAINT ANY VINYL SURFACES.

If your windows were not manufactured with factory-applied paint, DO NOT PAINT THEM. (If your windows were manufactured with factory-applied paint, then see the "Maintenance" section below for paint touch-up guidelines.)

Cleaning

Glass (Routine Cleaning) – Use a vinegar-based solution (10% vinegar and 90% water) or commercially available ammonia-free and alcohol-free window cleaner such as Sparkle Glass Cleaner. Apply a film of cleaner to a lint-free cloth or paper towel. Rub the glass surface to clean. Wipe dry with a clean, dry, lint-free cloth or paper towel. Avoid getting cleaning agents on any non-glass components.

Never use a razor blade or other metallic object to clean the glass. These can scratch the glass, leading to obstruction of clarity and/or glass breakage. (Razor blades or other metallic objects should not be used to clean any other window and door components.)

Spot Removal – Occasional spot cleaning may be required to remove stubborn dirt or foreign materials that have adhered to the glass surface(s). First, follow the Routine Cleaning instructions above. If contaminants remain, apply a small amount of non-abrasive cleaner (such as Bar Keeper's Friend®) or organic solvent (such as Goof-Off®) to a clean, dry, lint-free cloth or paper towel. DO NOT APPLY CLEANER DIRECTLY TO THE GLASS. On the affected area, work the cloth in multiple directions until spot is removed. Avoid getting cleaning agents on any non-glass components. Repeat the Routine Cleaning instruction above to remove any residual cleaner residue. For cleaning of Dual Low-E glass with the room side Low-E coating, please see the cleaning instructions listed next.

Room Side Low-E – Products purchased with the Dual Low-E glazing option have a Low-E coating applied to the room side of the windows. Never use a metallic object to remove debris from the Low-E coating. The room side Dual Low-E glass surface is to be cleaned with a solution of vinegar and water, soap and water, or a standard household window cleaner, such as Windex®. Caution should be taken when using anything abrasive on the Dual Low-E room side surface.

Screens – Remove the screen from the opening, wash with a mild detergent and water. Follow by rinsing with clean water.

Vinyl Surfaces – A mild detergent and water solution may be used. The following cleaners may also be used: Windex®, 409® Glass and Surface Cleaner, Spic and Span®, Cinch®, Glass Plus®.

CAUTION: If your windows were manufactured with factory-applied paint or factory-applied vinyl laminate, see the “Maintenance” section below for paint and laminate cleaning guidelines.

Coastal Environment – If your unit is located in a coastal environment, inspect all window and door components, including hardware, twice per month for indications of salt and sand accumulation, and any signs of corrosion. A rinse of the exterior window/door surface and operating hardware with fresh water is recommended. If additional cleaning is needed, follow the instructions in this guide.

Casement and Awning Hardware – Clean dirt and grime from window hardware. Particular attention should be paid to the hinge track. Clean water should be used to rinse away debris. A solution of mild soap and water can be used to loosen stubborn dirt. Always rinse with clean water. Allow to dry completely before lubricating (Maintenance). Never use cleaners with the following: vinegar base, citrus base, abrasive or industrial type cleaners. These types of cleaners may not only remove or break down lubricants; they can also diminish the effectiveness of corrosive resistant coatings.

Slider and Sliding Patio Door Sill Track – These two products have similar design concepts. The sash/panel must first be removed, allowing access to the sill track. To do this, refer to the “Sash/Panel Removal” section of this guide. Once the panel is removed you can proceed with the removal of the sill track. A gap has been provided at each end of the sill track for its removal. Using your finger(s) or some type of hook, pull up on the end of the sill track. Remove the sill track. Clean any dirt or debris from the sill. Pay particular attention to the weep holes. These must be free from any obstructions. Replace the sill track, centering it in the opening. Replace the sash/panel.

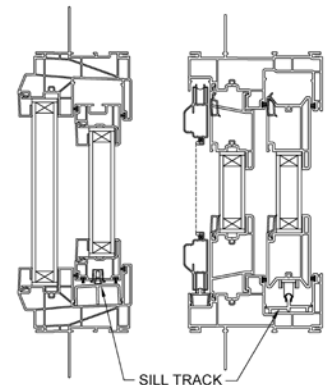


Fig.1

Inspection

Inspection of your window/door unit should be performed regularly. (As stated in this guide, it may be necessary to inspect more often in harsher areas such as coastal environments.) Special attention should be paid to:

Sealants – Inspect sealants for any cracking, peeling or gaps, which may have opened up over time.

Finish – Check for deterioration of finishes applied to hardware.

Glass – Check for any cracks or fogging between the panes on an insulated glass.

Hardware – Check for any dirt or grime build-up, which may cause poor operation or excessive wear.

Door sills – Check for any dirt or grime build-up, which may cause poor operation or excessive wear.

Maintenance

Factory-Applied Vinyl Paint Finish – If your windows have a factory-applied paint finish, please follow these instructions. As with all finishes, good maintenance is required.

Cleaning: For factory-applied vinyl paint finish, use a soft wet brush or cloth to remove all debris from painted surface. Never wipe with a dry brush or cloth, as some debris can abrade the paint finish. Any dry cement or other construction materials should be removed immediately with a soft brush, as it can attack the painted finish when it becomes wet. Wash the painted surface using a mild detergent with a soft sponge, chamois or similar soft absorbent cloth, then rinse and dry. Never use solvent based cleaners or PVC-U cleaners. Prior to cleaning, test the cleaner you will be using on an unexposed, non-visible painted part of the sash or frame.

Granular or particulate contaminants such as bird droppings, or salt or sand from coastal environments, should be removed immediately. When removing these items, never use a dry cloth. Always use warm water containing a mild detergent and a soft absorbent cloth, but not until loose particles have been removed from the finish surface using a soft, wet brush. The surface should be cleaned as described above using a mild detergent and a soft sponge or cloth, rinsed and dried.

Factory-Applied Laminated Finish – If your windows have a factory-applied vinyl laminated finish, please follow these instructions. As with all finishes, good maintenance is required.

Cleaning: For factory-applied vinyl laminated finish, use a soft wet brush or cloth to remove all debris from the laminated surface. Never wipe with a dry brush or cloth as this can damage the protective acrylic layer of the laminate. Wash laminate with a mild detergent or cleaner and a soft brush or cloth, then rinse with water and dry. Never use solvent-based cleaners, or PVC-U cleaners, on the laminate. Prior to cleaning, test the cleaner you will be using on an unexposed, non-visible laminated part of the sash or frame.

Granular or particulate contaminants such as bird droppings, or salt or sand from coastal environments, should be removed immediately. When removing these items, never use a dry cloth or brush. Always use water containing a mild detergent or cleaner and a soft absorbent cloth, but not until loose particles have been removed from the finish surface using a soft, wet brush. The surface should be cleaned as described above using a mild detergent and a soft cloth or wet brush, rinsed and dried.

Field Touch-Up Paint – Small scratches in the factory-applied painted vinyl finish can be repaired using touch-up paint. Small brush bottles of touch-up paint are available for order from Windsor. Clean the affected area to be painted per the paint cleaning instructions immediately above and allow the area to completely dry. Once dry, apply a small amount of touch-up paint and feather paint from the affected area with the surrounding painted finish and allow to dry.

Field Touch-Up Vinyl Laminate – Small scratches in the factory-applied vinyl laminate can be repaired with the color matched touch-up pen. Pens are available to order from Windsor. Clean the affected area to be touched-up per the laminate cleaning instructions immediately above and allow the area to completely dry. Once dry, apply the material in the touch-up pen to the affected area and let dry.

Casement and Awning Hardware – After the hardware has been cleaned, or as a yearly maintenance practice, it should be lubricated to restore smooth operation. The following are recommended lubricants and their applications:

Operator: Lithium grease, automotive grease, petroleum jelly.

Hinges and locks: WD-40®, CD2®, 3-in-1 oil, graphite. Possible staining may occur if any of these products make contact with wood frame or sash members. Avoid the use of silicone-based lubricants as they may result in causing some plastic parts to become brittle.

Door Hardware – Shoot some dry graphite into the lock cylinder keyway once or twice a year.

Sash/Panel Adjustment

Prior to any adjustment, an evaluation should be made of the windows/doors' installation integrity. Is the unit installed correctly and shimmed properly?

Casement – When viewing a casement from the exterior, the margin around the perimeter of the sash should be consistent. If this is not the case, the hinges allow for some adjustment. To familiarize yourself with the hinge assembly, open your casement window. Fastened to the window frame head and sill is a silver hinge track. Stamped into the track, you should see “PRY TO REMOVE SASH” and an arrow.

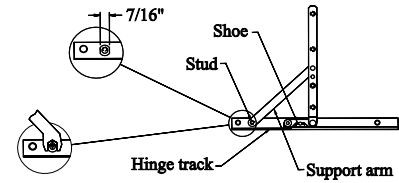


Fig.2

The arrow points to a stud projecting from the track with a flat bar (hinge arm) attached to it. Under the flat bar is an offset nut. When turned, the center of the stud changes position. Using a flat wrench, which can be obtained from your local independent Windsor distributor, turn the offset nut.

(A 7/16" open end wrench can also be used to make adjustments. The hinge arm must first be pried up and off the stud, allowing access to the offset nut.) Turning the wrench in one direction will move the bottom of the sash in that direction. Turning it in the opposite direction will move the bottom of the sash in the opposite direction. The same can be performed to the top track. Do not rotate more than 45 degrees from the face of the window.

Sliding Patio Door – To ensure your door is performing properly, the active panel should be parallel with the side jamb. Locate the panel edge about 1/16" from the edge of the side parting stop. If the gap is not consistent from top to bottom, the panel requires adjustment.

At the bottom edges of the active panel are roller adjustment screws. Using a screwdriver, turn the screws to adjust each side of the panel up or down until the panel is parallel with the side jamb.

Blinds Between the Glass Adjustment

Next Dimension Patio Doors – Blinds between the glass require time to acclimate for proper performance. Typical acclimation time is 24-48 hours. Time will vary depending on geographic location, air pressure and temperature. Recent changes in any one of these conditions can lengthen the acclimation time.

Due to the extended period of time blinds are in the raised position, the cords may gain a memory of the raised position. Because of this, one of the most important and effective ways to correct any initial issues with the blind unit is to exercise the blinds to work out the memory of the raised position.

When to exercise the blinds:

- Blinds will not fully raise or lower
- Raise/lower operator decouples
- If blinds are not level

How to exercise the blinds:

- Fully lower the blinds all the way down at medium speed
- Make sure the blinds are tilted to the fully open position (you will be able to see through the blinds)
- Fully raise the blinds all the way to the top at medium speed
- Repeat several times

If your blinds will not raise or lower, the likely cause is the raise/lower operator is disengaged from the magnet under the glass. This can happen on occasion during shipping, handling and installation. To correct this, move the raise/lower operator all the way down (the blinds will be in the raised position). Slowly raise the operator all the way up until you hear two clicks (which is the magnet engaging), thus completing the procedure.

If your blinds will not tilt, as with the raise/lower operator described above, the likely cause is the tilt operator has become disengaged from the magnet under the glass. To correct this, move the tilt operator (top operator) all the way open and closed several times slowly. While doing this, a click will indicate the magnet has re-engaged.

Screen Removal

Casement – Located on the inside edge of the screen frame are a number of screen plungers. To remove the screen, the plungers must be retracted. Grasping both plungers from one side of the screen, pull up on the plungers and swing the screen toward the interior. If the screen does not swing in freely, you have not pulled up on the plunger far enough. Guide the screen sideways and remove. Return the screen by reversing the previous steps.

Double Hung and Single Hung – Located on the inside edge of the screen frame are a number of screen plungers. To remove the screen, the plungers must be retracted. Grasping both plungers, one from each side of the screen, pull up on the plungers and swing the screen toward the exterior. If the screen does not swing out freely, you have not pulled up on the plunger far enough. Lower the screen from the head jamb (double hung) or meeting rail (single hung) and remove. Return the screen by reversing the previous steps.

Sliding Patio Door – Located on the bottom edge of the screen are a pair of rollers. Using a Phillips head screwdriver, lift up on the roller wheel until it clears the track it is riding on. Pull the bottom of the screen toward you. Continue with the remaining wheel. Swing the bottom of the screen toward the exterior lowering the screen from the head track. Return the screen by reversing the previous steps. Using the screwdriver, lift up on the wheels and push the screen back into place, one side at a time.

Sash/Panel Removal

Signature and NEW Next Dimension Casement – Open your window about halfway. Opening your sash is a combined effort of two arms. One is snapped over a stud on the inside face of the window sash. The other rides along a track on the inside face of the window sash. The first step is to slide the stud clip off the stud. A slot has been provided in the clip for a standard head screwdriver. Place the tip of the screwdriver in the slot and push away from the stud. Proceed by placing the tip of the screwdriver between the primary arm and the bracket holding the stud.

Twist the head of the screwdriver and pop the arm from the stud. If you push or pull the lock side of the sash, it will swing slightly back and forth. On the inside face of the sash is an operator track. The top of the track has a note specifying “DEPRESS ARM TO DETACH” and an arrow. Located at the end of the secondary arm is a roller.

Move the sash in or out and position the center of the roller at the arrow. You may require the assistance of the operator crank to position the arm. Push the secondary arm down and pull forward. It will disengage from the operator track. Swing the sash out until it is 90 degrees to the window frame. The hinge arm must now be detached from the sill hinge track. Place the tip of your flat head screwdriver between the hinge arm and the track. As you did with the primary arm, twist the head of the screwdriver and pop the hinge arm from the stud. Repeat at the head. With one hand on the lock side of the sash and the other hand on the opposite side, slide the sash sideways. Slide the sash along the hinge track until the head can tip outward. Tip the head out as you lift up on the

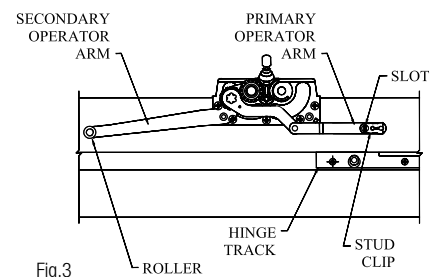


Fig.3

bottom of the sash. Pull the sash in through the window opening. Reverse these steps to replace the sash. Swing the sash out the window opening. Set the base on the sill track and rotate the head up. Located on the top and bottom of the sash is a shoe. A tongue on the hinge track must slide into a groove on the shoe. Once these two are engaged, slide the sash to the side opposite of the lock. Position the hinge arm over the upper and lower hinge track stud and snap in place. Swing the lock side of the sash inward. Align the secondary arm roller with the arrow on the operator track, push down, over and allow it to relocate in the track. Snap the primary operator arm over the stud on the sash stud bracket and slide the stud clip back in place.

Pro Single Hung – With the operating sash in the closed position, extend the stainless steel spring takeout clips located inside the jamb pockets just above the top of the operating sash. Unlock and slide the operating sash until the balances engage the takeout clips; the sash will feel heavier as the balances engage the clips and release the weight of the sash.

NOTE: It is important that BOTH balances engage in BOTH takeout clips. It is possible to have only one side engage. If this occurs, close the operating sash and try again. Once the sash releases from the balances, continue lifting the sash another 3". Slide the sash sideways until the opposite side of the sash clears the jamb pocket. Rotate the sash out of the jamb. To replace the sash, reverse the previous steps. Holding the sash above the balances rotate the sash into the jamb pocket on one side. Slide the sash horizontally until both sides of the sash are captured in both jamb pockets. Lower the sash to the closed position, automatically engaging the sash with the balances. Push in the stainless steel spring takeout clips.

Classic and NEW Next Dimension Double Hung and Single Hung – Unlock and slide the bottom sash to an open position (about 3"). Located on the top of each end of the bottom sash are tilt latches. The tilt latch has a button on it, which slides. Each of the two buttons must be slid toward each other before the top of the sash can be tilted inward. Swing the sash down until it is 90 degrees to the window frame.

CAUTION: Rotating the sash more than 120 degrees, past vertical, can cause damage to the sash balance components. Rotate one side of the sash up, until the pivot pin releases from the balance shoe. Repeat this process with the opposite side to remove the sash. To replace the sash, reverse the previous steps. Angle sash over the appropriate balances. Drop one corner of the sash, locking the tilt pin into the balance shoe. Repeat process on the opposite side. At this point your sash should be seated in the balance shoes and 90 degrees to the window frame. Swing the sash upward until the tilt latches snap back into the balance pocket. *Double hung units only: To remove the top sash, lower the sash to an open position (about 3") and use the same process to release the sash from the balance shoes.*

Sliding Patio Door – Slide the panel to an opened position. Lift up on the sash/panel and tilt the bottom inward. Once the sash/panel has cleared the sill, lower it from the head jamb. To replace, reverse the previous steps.

Pro, Classic and NEW Next Dimension Slider – Slide the sash to an opened position. There is an anti-lift block located in the head pocket; this feature requires opening the sash 3-6" to avoid the anti-lift feature. Lift up on the sash and tilt the bottom inward. Once the sash has cleared the sill pocket, lower it from the head jamb. To replace, reverse the previous steps.

Condensation

Building a tighter, more energy efficient home like the homes being built today, may result in elevated indoor humidity levels. Older homes had been unknowingly designed and constructed with random gaps, which allowed warm, moist air to be released and replaced by cool, drier air. Newer construction methods do not allow for this natural air-to-air exchange, thus trapping any internally created humidity within the structure. Elevated amounts of humidity can cause condensation to form on cold surfaces, and unaddressed condensation could eventually damage your windows. Sweaty, frosted or icy windows are all indicators of condensation problems. Many people assume that condensation indicates a problem with the window but, in fact, it is a symptom of excess humidity in the home. Condensation on your windows could result in other moisture problems, including mold or mildew on cold exterior wall surfaces, peeling paint, wood rot and the failure of wall insulation.

Relative humidity is a measure of how much moisture air will hold relative to the maximum it could hold at a given temperature. Warmer air can hold more moisture than cool air. When warm, moist air comes into contact with a cold

surface it takes on its liquid form, much like the moisture on the outside of a glass of ice water on a hot, humid summer day. Indoor humidity must remain at a level that will not permit air to condense on the glass surface.

Indoor humidity levels should be monitored to eliminate the possibility of condensation. The chart to the right illustrates recommended winter humidity levels:

Outdoor Temp. Indoor Humidity@70°F

-20°F or below	not over 15%
-20°F to -10°F	not over 20%
-10°F to 0°F	not over 25%
0°F to +10°F	not over 30%
+10°F to +35°F	not over 35%

These are the recommended humidity levels, and may not be applicable for every household. Differences in glass types (LoE vs. clear) will allow for variances in humidity levels. Window condensation is a good indicator as to the maximum allowable humidity level. If your windows begin to sweat, the humidity in your home is too high.

Window Safety

Sash Opening Limiting Devices

- Always refer to applicable building codes when considering the purchase, installation and application for use as a Window Opening Control Device (WOCD). Also refer to ASTM F2090-10 for additional information.
- If Window Sash Opening Limiting Devices are going to be installed, carefully follow all information provided with the Window Sash Opening Limiting Devices, including installation, operation and safety information. Proper installation of Window Sash Opening Limiting Devices, pursuant to applicable building codes, ASTM F2090-10, and the included installation information, along with application of tags/labels including the safety instructions left attached for the homeowner, allows these devices to be used as Window Opening Control Devices.
- Supervision is still required around windows where Window Sash Opening Limiting Devices have been installed.

National Window Safety Council Tips

- Keep windows closed and locked when not in use for ventilation.
- Avoid placing furniture that young children can climb on near windows.
- Do not lean on screens or rely on them to prevent a window fall – insect screens are designed to keep bugs out, not to keep children in the home.
- Supervise children to prevent them from playing near windows, balconies or patio doors.
- Install building code-compliant devices such as window guards (with quick-release mechanisms in case of fire).
- Create soft landing surfaces (i.e., bushes or plant beds) to help prevent serious injuries in case of a fall.
- Have and practice a family escape plan, and teach children how to safely use a window to escape during an emergency.
- When performing spring repairs, make sure windows are not painted or nailed shut, as you must be able to open them to escape in an emergency.

Visit the window safety section of the NSC website (www.nsc.org) to learn more.

Warranty Claim Procedure

If you have any questions regarding this warranty or have a claim under the provisions of this warranty (your “Claim”), please contact your local authorized independent Windsor distributor or one of our manufacturing facilities listed on the back of this brochure. To process a Claim, you must furnish the glass code (numbers and/or letters printed within/upon the insulated glass unit). If you have questions about locating the glass code, please contact one of the Windsor facilities OR REFER TO THE SUPPORT PAGE ON OUR WEBSITE. You must notify your local independent Windsor distributor or Windsor of any defects within a reasonable time, but no later than 30 days after the defect is discovered or reasonably should have been discovered, and within the period covered by the warranty. Windsor may require any defective parts be returned to Windsor or our closest distributor. In order to process a Claim, Windsor reserves the right to inspect the product before it is removed or modified in any way. Windsor field visits may result in service charges if a non-warranty site survey is required and/or requested.

Response by Windsor

Windsor will have 30 days to respond to your Claim, with an explanation of what Windsor is willing to do relative to your Claim. Please keep in mind that this response may include an explanation of some action Windsor would like to take, such as conducting further investigation, or it may state that Windsor is not willing to take any action. We point this out to make it clear that Windsor is committing to respond to your Claim, not agreeing to remedy the problems described in every Claim it receives. If you are in any way dissatisfied with Windsor’s response to your Claim, you must follow the steps of Windsor’s Dispute Resolution Process as outlined below.

ATTENTION! ARBITRATION AGREEMENT; JURY TRIAL WAIVER; CLASS ACTION WAIVER. By purchasing, installing, or using this product, you agree to arbitrate any dispute you may have with Windsor relating to your Windsor products, and to waive your rights to a jury trial and to participate in class-action or class-arbitration proceedings, relating to any such disputes. For more details, and to learn how YOU CAN OPT OUT OF THIS ARBITRATION AGREEMENT AND THESE WAIVERS, please go to [www.windsorwindows.com/support/Dispute Resolution](http://www.windsorwindows.com/support/Dispute%20Resolution).

Dispute Resolution Process

You and Windsor agree that any Dispute arising out of or related to the Windsor products shall be resolved pursuant to the terms of the Dispute Resolution Process defined in this warranty. The term “Dispute” shall mean any and all claims based on any theory (including, but not limited to, contract, warranty, tort, product liability, strict liability, fraud, consumer protection, subrogation or any other applicable statute, regulation, ordinance or common law) arising out of or related to your Windsor products (including, but not limited to, the design, manufacture, sale, distribution, marketing, warranty, service, use, performance, installation or purchase of your Windsor products) and/or the validity or enforceability of this Warranty and/or the Arbitration Agreement.

Notice of Dispute

The first step in the Dispute Resolution Process is for you and Windsor to attempt to resolve your Dispute informally. To initiate the Dispute Resolution Process, you must provide Windsor with a Notice of Dispute. You can do so either by visiting www.windsorwindows.com/support, which will take you to a form that you need to complete, or by calling Windsor at 1-800-218-6186.

Response by Windsor

Windsor will have 60 days to respond to your Notice of Dispute by providing a written explanation of what Windsor is willing to do relative to your Dispute.

Arbitration Agreement and Jury-Trial and Class-Action Waivers

If you and Windsor are unable to informally resolve your Dispute to your satisfaction, you may seek to formally resolve your Dispute through arbitration. BY PURCHASING, INSTALLING OR USING THIS PRODUCT WITHOUT OPTING OUT AS PROVIDED BELOW, YOU AGREE TO ARBITRATE ANY DISPUTE YOU MAY HAVE WITH WINDSOR RELATING TO YOUR WINDSOR PRODUCTS AND TO WAIVE YOUR RIGHTS TO A JURY TRIAL AND TO PARTICIPATE IN CLASS-ACTION OR CLASS-ARBITRATION PROCEEDINGS RELATING TO ANY SUCH DISPUTES. The full terms and conditions applicable to this Arbitration Agreement and these waivers are set forth in Windsor's "Arbitration Agreement," which is incorporated herein by reference and is available at www.windsorwindows.com/support or by calling Windsor at 1-800-218-6186.

Arbitration Opt-Out Option

YOU CAN OPT OUT OF THE ABOVE ARBITRATION AGREEMENT AND WAIVERS. To do so, you must notify Windsor within 90 calendar days of the date you purchased or otherwise took ownership or other interest in your Windsor products either by visiting www.windsorwindows.com/support and completing the Opt-Out Form located there, or by calling Windsor at 1-800-218-6186. Opting out of the Arbitration Agreement will not affect the coverage provided by any warranty applicable to your Windsor products.

Failure to Follow Procedures or Processes

The failure to follow any of the steps outlined in the Claims Procedures or Dispute Resolution Process sections of this document does not alter, waive or void any of the terms of this document. Opting out, as described above, is the only way to alter, waive or void the Arbitration Agreement and waivers described herein.

Applicable Law and Severability

This Dispute Resolution Process, including, but not limited to, issues related to its enforceability and effect, will be governed by the laws of the State of Minnesota without regard to conflict of law principles. If any term(s) of this Dispute Resolution Process, Arbitration Agreement and/or waivers is/are found to be invalid or unenforceable in any particular jurisdiction, that term will not apply to that issue in that jurisdiction. Instead, that term will be severed with the remaining terms continuing in full force and effect.

Effective on Next Dimension products manufactured after 1/1/2020.



CONNECT WITH US



900 South 19th Street, West Des Moines, IA 50265 • 515.223.6660 • 800.218.6186
1400 North Sutherland Avenue, Monroe, NC 28110 • 704.283.7459 • 800.205.5665

www.windsorwindows.com

A WOODGRAIN COMPANY

© 2024 Woodgrain Millwork Inc. Woodgrain Millwork, Windsor, the Windsor Lion logo, Next Dimension and Legend are registered trademarks of Woodgrain Millwork Inc. Windsor Windows & Doors, Pinnacle, Revive and Redstone are trademarks of Woodgrain Millwork Inc.



Windsor Windows & Doors is an ENERGY STAR® partner and an NFRC and WDMA member. Windsor products are certified and labeled according to the guidelines established by the National Fenestration Rating Council (NFRC).